


## HTU VS. Gas Rate No. 3 Type K Tellerette® Packing Sulfur Dioxide-Air-Caustic

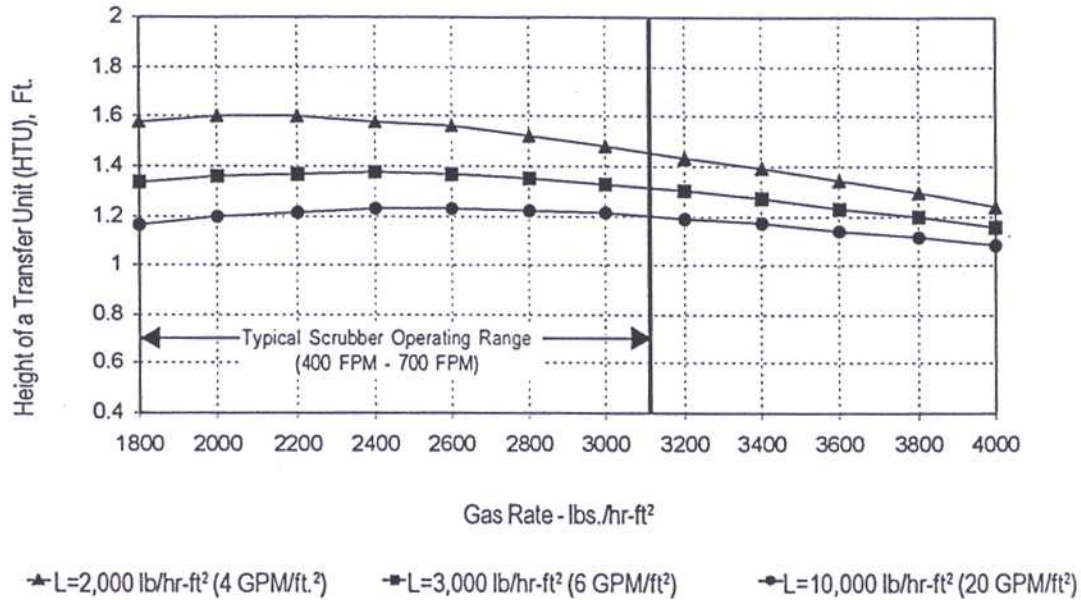

**Test Conditions**  
 30 in. diameter column  
 4 ft. packing depth  
 50-150 ppmv SO<sub>2</sub> inlet concentration  
 Liquid—NaOH solution at pH>8  
 Liquid Temperature—50-75°F